

# HTE Series



### Model.

HTE - X

Communication	
A	232
B	485
C	Ethernet&232
E	Ethernet


OLED	
1	Without
2	With

Membrane Key	
1	With Standard
2	Customized

Line length	
A	Wireless
B	3 meters (network)
C	5 meters (network)
D	7 meters (network)
E	10 meters (network)
F	15 meters (network)
Can be customized	

The safety switch	
0	Without
1	One 3 position
3	One 2 position
5	One 3 position (enabling)

### External Dimension.

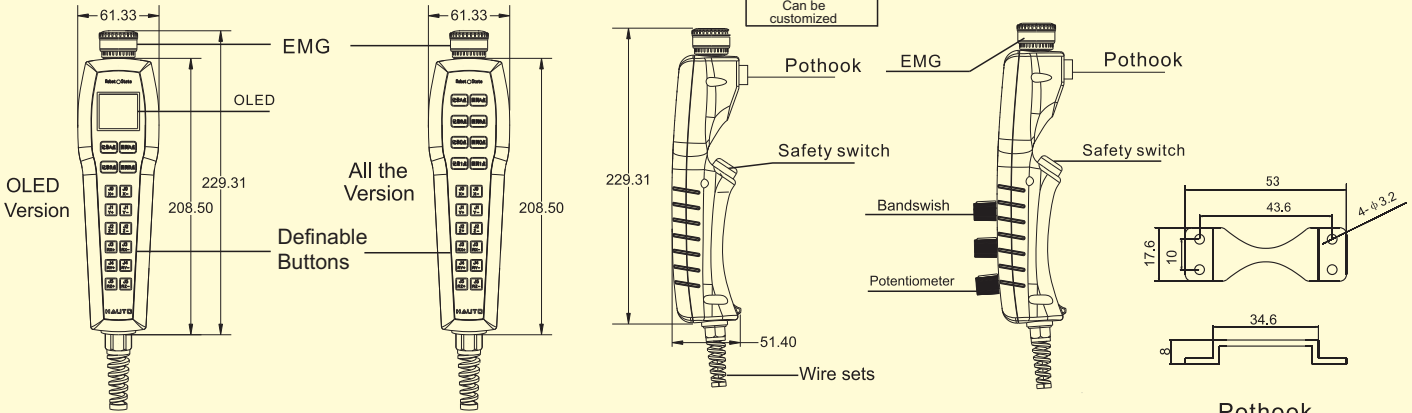

### characteristics

Processor	Cortex-M3 72MHz
FLASH	256KB
LCD	1.46"OLED 128*128 Pixel
O/S	uC/OS-II
Membrane key	key : Max 20 个 (ea) pilot lamp : Max 1 个 (ea)
Communication	RS232, RS485, Ethernet (100M)
Parts	Emergency stop Band switch Safety switch Potentiometer
Sensor	Built-in acceleration and gyro sensors

Regulating Switch Version

Lighting surge $\pm 4KV$
Group pulse $\pm 4KV$
Static contact $\pm 6KV$
Air discharge $\pm 6KV$
Pass the 1 meter drop test
Certified by CE

### Junction Box

